


陶瓷滤波器(10×10×5)技术指标:

- Available 4 pass bandwidth variation to meet various requests
- Applications:TV,VCR Stage,etc

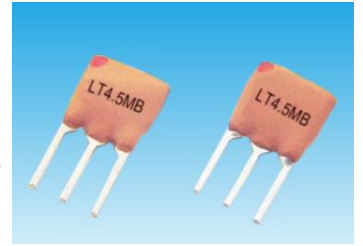

Part Number	Center Frequency	3dB Band Width KHz	20dB Band Width KHz	Insertion Loss(dB)	Spurious Attenuation(9-12MHz)Min	Input/Output impedance
LT4.5MB	4.5MHz	$\geq f_0 \pm 60$	≤ 530	≤ 6.0	20dB(4.5+0.8/4.5-1.0MHz)	1000 Ω
LT5.5MB	5.5MHz	$\geq f_0 \pm 75$	≤ 550	≤ 6.0	25dB(5.5 $\pm$ 1.0MHz)	600 Ω
LT6.0MB	6.0MHz	$\geq f_0 \pm 80$	≤ 600	≤ 6.0	25dB(6.0 $\pm$ 1.0MHz)	470 Ω
LT6.0MB	6.5MHz	$\geq f_0 \pm 80$	≤ 630	≤ 6.0	25dB(6.5 $\pm$ 1.0MHz)	470 Ω

PACKAGE:

UNITS:MM

