


陶瓷滤波器 (8×7×8) 技术指标:

Frequency: 3.58MHz~6.5MHz;


Wide bandwidth Ceramic Trap

Applications: TV SIF stage use



Part Number	Trap Attenuation(at nominal frequency)	20dB Band Width KHz	30dB Band Width KHz
XT3.5MB	25dB		≥40(70)
XT4.43MB	20dB		≥50(80)
XT4.5MB	35dB		≥70(120)
XT5.5MB	35dB		≥90(120)
XT5.74MB	35dB		≥90(120)
XT6.0MB	20dB		≥90(120)
XT6.5MB	20dB		≥90(120)
XT4.5MB	20dB	≥30	35
XT5.5MB	20dB	≥30	20

Dimensions[mm]

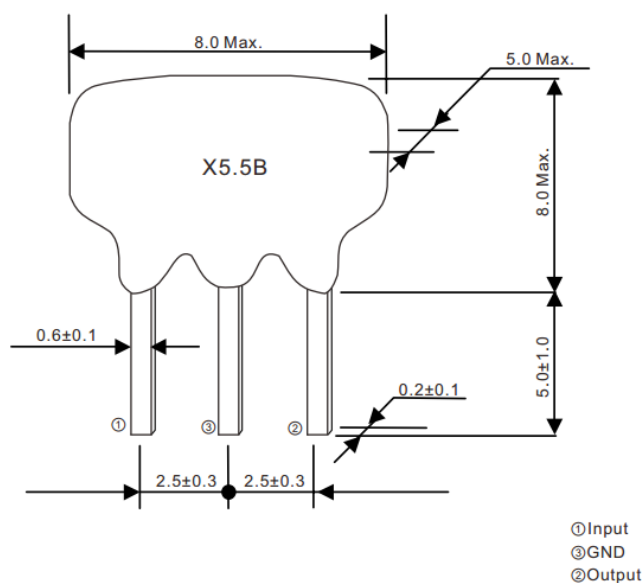

Characteristics

